


Moduł Serial WIFI ESP8266 ESP-01S

kategoria: Kategorie > Elektronika Płytki PCB electronics



Kod QR:

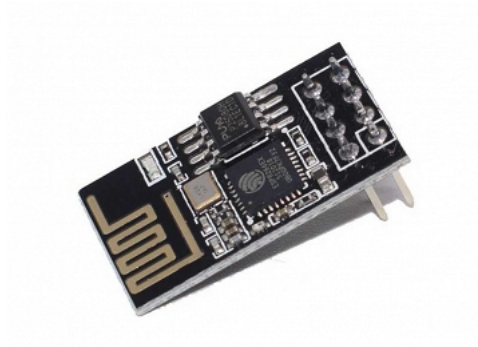

ESP8266 is a highly integrated chip designed for the needs of a new connected world. It offers a complete and self-contained Wi-Fi networking solution, allowing it to either host the application or to offload all Wi-Fi networking functions from another application processor.

ESP8266 has powerful on-board processing and storage capabilities that allow it to be integrated with the sensors and other application specific devices through its GPIOs with minimal development up-front and minimal loading during runtime. Its high degree of on-chip integration allows for minimal external circuitry, and the entire solution, including front-end module, is designed to occupy minimal PCB area.

Features

strona: 1/3 wydrukowano: 09-05-2024

<http://www.asun.pl/modul-serial-wifi-esp8266-esp-01s.html>

*SDIO 2.0, SPI, UART
32-pin QFN package
Integrated RF switch, balun, 24dBm PA, DCXO, and PMU
Integrated RISC processor, on-chip memory and external
memory interfaces
Integrated MAC/baseband processors
Quality of Service management
I2S interface for high fidelity audio applications
On-chip low-dropout linear regulators for all internal supplies
Proprietary spurious-free clock generation architecture
Integrated WEP, TKIP, AES, and WAPI engines*

Solutions

*Supports APSD for optimal VoIP applications
Patented spurious noise cancellation algorithm for
integration in SOC applications
Supports Bluetooth co-existence interface
Self-calibrated RF to ensure optimal performance under all
operating conditions
Zero factory tuning
No external RF components*

Specifications

*802.11 b/g/n
Wi-Fi Direct (P2P), soft-AP
Integrated TCP/IP protocol stack*

Integrated TR switch, balun, LNA, power amplifier and matching network
Integrated PLLs, regulators, DCXO and power management units
+19.5dBm output power in 802.11b mode
Power down leakage current of <10uA
Integrated low power 32-bit CPU could be used as application processor
SDIO 1.1/2.0, SPI, UART
STBC, 1×1 MIMO, 2×1 MIMO
A-MPDU & A-MSDU aggregation & 0.4ms guard interval
Wake up and transmit packets in < 2ms
Standby power consumption of < 1.0mW (DTIM3)

Help your development more easy.
ESP8266 Serial WIFI Module Communitie Forum>> Detail about ESP8266

- 1. High quality & low price*
- 2. LWIP agreement*
- 3. Support 3 modes: AP, STA, AP+STA*
- 4. Perfect and simple AT commands*

Now your Arduino can get on WiFi without braking the bank.
Use this module for your next Interet of Things project, home automation, Or remote sensor project.
This module adats the ESP8226 IC for use over a serial connection using simple AT commands.
No SPI interface or Know-How is required.