


## Panel solarny half-cut monokrystaliczny 550W Zestaw 2 szt.

kategoria: Kategorie > SOLAR System



Kod QR:

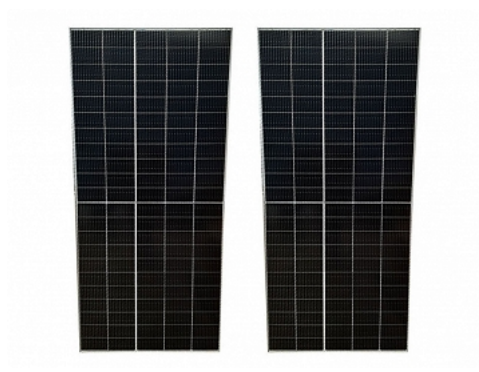

Monocrystalline panel type Maximum power (Pmax) 550 W Maximum voltage (Vmp) 32 V  
Maximum current (Imp) 17.19 A Open circuit voltage (Voc) 37.9 V Short circuit (Isc) 18.02 A  
Operating temperature (min - max) -40° C / +85° C Class A classification Efficiency 21.3 %  
Dimensions 2386 x 1096 x 35 mm Anodized aluminum alloy frame Ip 68 protection Weight 28  
Kg

Tip panou      Monocristalin

Putere maxima (Pmax) 550 W

Tensiune maxima (Vmp)      32 V

Curent maxim (Imp)      17.19 A

Tensiune circuit deschis (Voc) 37.9 V

Scurtcircuit (Isc) 18.02 A

Temperatura de functionare (min - max) -40° C / +85 ° C

Clasificare Clasa A

Eficienta 21.3 %

Dimensiuni 2386 x 1096 x 35 mm

Cadru Aliaj din aluminiu anodizat

Protectie Ip 68

Greutate 28 Kg